

## IBT-300 Software Update Instruction

- Switch off the IBT and connect it to the power supply.
- Connect IBT and PC using the enclosed cable K766.
- Unzip the attached file "IBT300\_V405.zip" in a directory of your selection.
- **Copy the folder called "tffs" into the Root off the same partition used:**  
example:  
If the file "IBT300\_V405.zip" was unzipped into the folder "D:\IBT\IBT300\_V405",  
the subdirectory called "D:\IBT\IBT300\_V405\tffs" must be copied direct onto "D:\".
- Double click the file **install.exe**.



- Select the language and press "Install now".




- Switch on the IBT and press immediately the function key F5 until the message "File transfer server started" is displayed.
- Select the COM Port used (in general COM1).

- Start the Update. The serial number of the IBT will be automatically inserted.
- The update takes a few minutes. The bar "Upload progress" informs about the state of the update.

**\*\*\*\*\* Do not cancel this process under any circumstance! \*\*\*\*\***



At the end of the data transfer the serial number disappears and the info field shows "Upload successful. Press 'OFF' then 'ON' so that the IBT validates the new configuration."

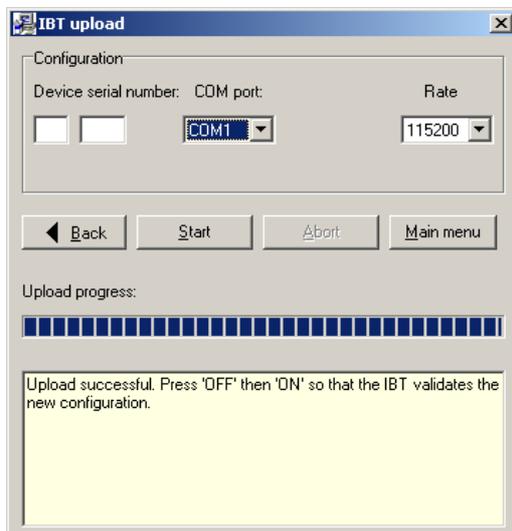

- Close the application.
- Switch the IBT off and on to leave the transfer modus.

**The IBT-X00 has now the new software release installed.**