


MAX TNT

Hybrid Access (Single Shelf)

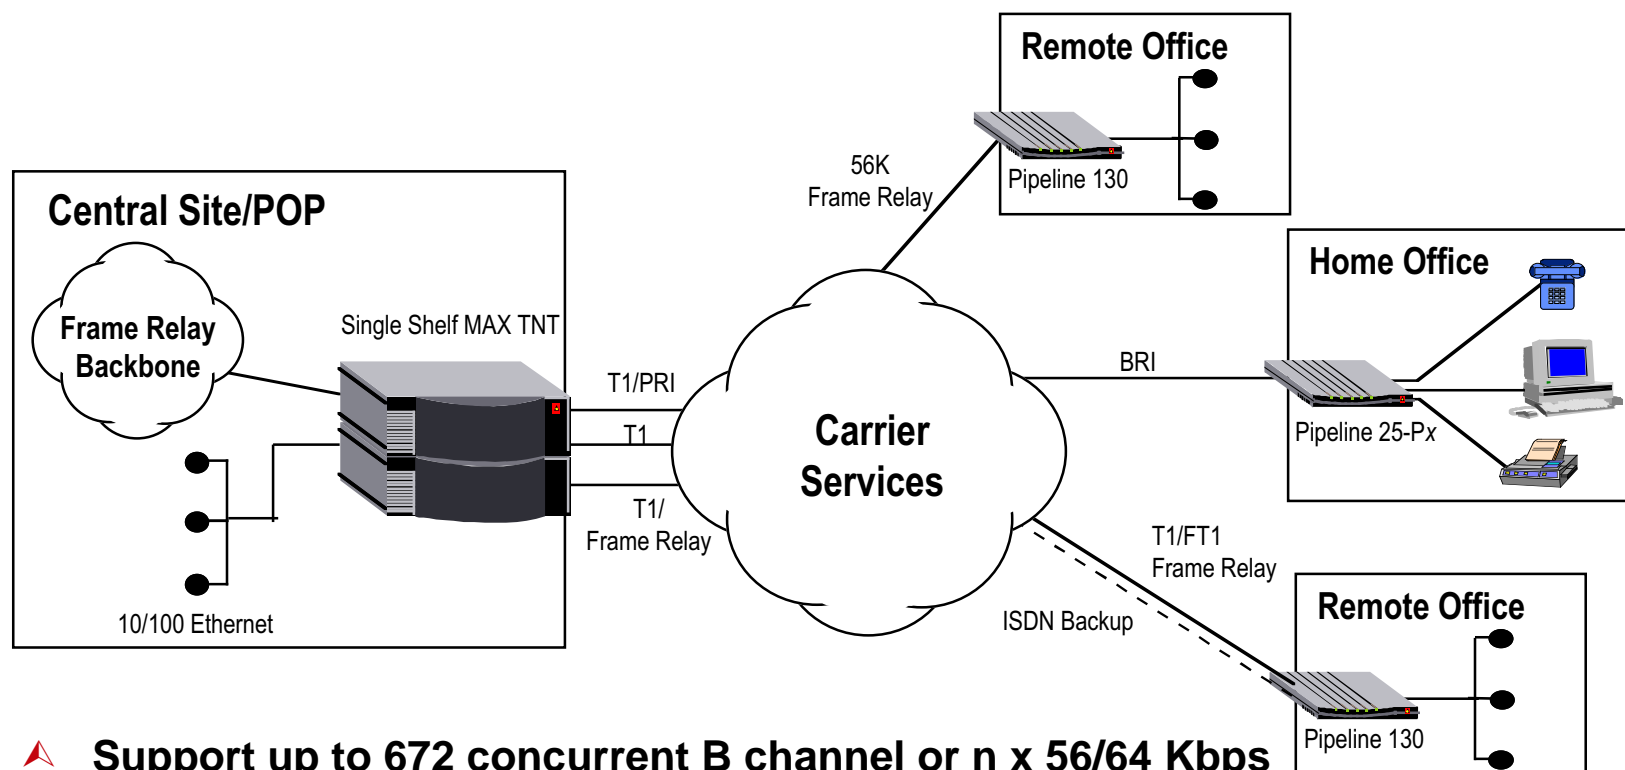

- ▲ **Support up to 672 concurrent B channel or $n \times 56/64$ Kbps Frame Relay sessions**
- ▲ **Support up to 28 T1/PRI**
- ▲ **10/100 Mbps Ethernet**
- ▲ **T1, Serial V.35 (8 Mbps) and HSSI (52 Mbps) Frame Relay**